
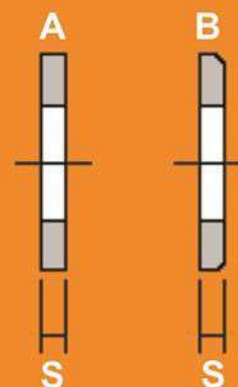


DIN 125

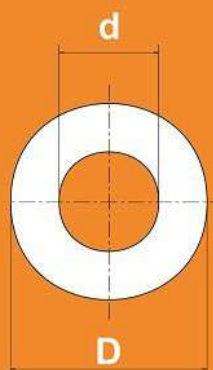

## MEDIDAS DIMENSIONAIS EM MM

NOMINAL	Parafuso	D		d		S	
		MÍN.	MÁX.	MÍN.	MÁX.	MÍN.	MÁX.
M-3	M-3	3,2	3,38	6,64	7	0,45	0,55
M-4	M-4	4,3	4,48	8,64	9	0,7	0,9
M-5	M-5	5,3	5,48	9,64	10	0,9	1,1
M-6	M-6	6,4	6,62	12,07	12,5	1,4	1,8
M-7	M-7	7,4	7,62	13,57	14	1,4	1,8
M-8	M-8	8,4	8,62	16,57	17	1,4	1,8
M-10	M-10	10,5	10,77	20,48	21	1,8	2,2
M-12	M-12	13	13,27	23,48	24	2,3	2,7
M-14	M-14	15	15,27	27,48	28	2,3	2,7
M-16	M-16	17	17,27	29,48	30	2,7	3,3
M-18	M-18	19	19,33	33,38	34	2,7	3,3
M-20	M-20	21	21,33	36,38	37	2,7	3,3
M-22	M-22	23	23,33	38,38	39	2,7	3,3
M-24	M-24	25	25,33	43,38	44	3,7	4,3
M-26	M-26	27	27,33	49,38	50	3,7	4,3
M-27	M-27	28	28,33	49,38	50	3,7	4,3
M-30	M-30	31	31,39	55,26	56	3,7	4,3
M-36	M-36	37	37,39	65,26	66	4,4	5,6

Forma A ( **STANDER** )      Forma B ( **CHANFRO EXTERNO** )Material - **SAE 1010 / 1020 - SAE 1045 A 1070**Acabamento - **Polido / Zincado / Galvanizado a Fogo**